




BEVERAGE CATALOG



**Hose For Every Service
Since 1932**

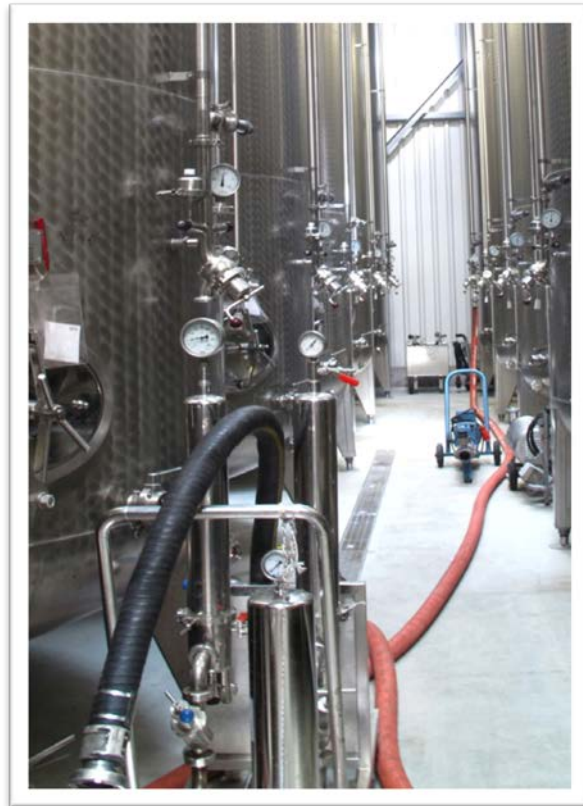

Extremeflex Beverage Red with EZ Clean Cover

Construction: Tube: White Chlorobutyl (FDA/USDA compliant and conforms to 3-A Sanitary Standard 18-03), non-phthalates compound. Cover: Wide corrugated, red, low friction material, abrasion, ozone, ageing, oil and chemical resistant, easy to clean. Reinforcement: Spiral-plyed fabrics with double galvanized helix wire.



Temperature: -30°F to 220°F

Sizes: 1" - 4"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Hose
1	250	EXBR100
1-1/2	250	EXBR150
2	200	EXBR200

Extremeflex Beverage Gray

Construction: Tube: White Chlorobutyl (FDA/USDA compliant and conforms to 3-A Sanitary Standard 18-03), non-phthalates compound. Cover: Corrugated grey Nitrile Rubber/PVC compound (wrapped impression) Reinforcement: Spiral-plyed fabrics with double galvanized helix wire.



Temperature: -30°F to 220°F

Sizes: 1" - 4"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Hose
1	250	EXBG100
1-1/2	250	EXBG150
2	200	EXBG200

EZ Glide Wine

Construction: Tube: white chlorobutyl rubber, non-phthalates compound. Cover: Grey Nitrile Rubber/PVC compound and green outer helix reinforced with synthetic fabric plies.



Temperature: -20°F to 180°F

Sizes: 1-1/2" - 3"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Hose
1-1/2	150	EXBW150
2	150	EXBW200

Purple Snake®

Construction: white, non-porous and high-performing special lining, absolutely neutral to taste and odour. Red, fabric patterned special cover, resistant to ozone, weather, UV and abrasion. Synthetic fibers reinforcement.



Temperature: -22°F to 194°F

Sizes: 1/2" - 4"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Hose
1	232	
1-1/2	232	
2	232	

Purple Snake® Plus

Construction: white, non-porous and smooth UPE lining, absolutely neutral to taste and odour. Red, fabric patterned special cover, resistant to ozone, weather, UV and abrasion. Synthetic fibers reinforcement.



Temperature: -22°F to 203°F

Sizes: 1" - 4"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Hose
1-1/2	232	
2	232	

Plicord Distillery 150

Construction: UHMWPE (FDA/USDA and 3A compliant, NSF 61 listed material) tube. Corrugated grey EPDM (wrapped impression) cover. Spiral-plyed fabrics with double galvanized wire helix reinforcement.



Temperature: -40°F to 150°F

Sizes: 1" - 4"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Hose
1-1/2	150	
2	150	

Fitting Options



Male Din Fitting	Female Din Fitting with nut	Crimped Tri-Clamps	Crimped Tri-Clamps with Bumper	Crimped Tri-Clamp One Piece
1	1	1	1	1
1-1/2	1-1/2	1-1/2	1-1/2	1-1/2
2	2	2	2	2

We offer a wide variety of beverage transfer hoses to fit your individual needs. Any of these hoses can be sold in bulk or assembled with the fitting combinations below.

Novabrew

Construction: Tube: White Chlorobutyl (FDA/USDA compliant and conforms to 3-A Sanitary Standard 18-03). Cover: Dark burgundy EPDM. Reinforcement: Multiple plies of polyester tire cord and dual monofilament helix rods.



Temperature: -40°F to 240°F
Sizes: 3/4" - 4"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Hose
1	250	NF-6507-100
1-1/2	250	NF-6507-150
2		NF-6507-200

Extra Flexible White UHMW EPDM Food

Construction: Tube: White FDA UHMW. Cover: Grey EPDM corrugated. Reinforcement: Multiple plies of polyester tire cord with helix wire. * Also available with slide cover



Temperature: -40°F to 225°F
Sizes: 1" - 4"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Hose
1	200	NF-6433-100
1-1/2	200	NF-6433-150
2	200	NF-6433-200

UHMW Tube and smooth EPDM Cover

Construction: Tube: FDA UHMW- odor and tasteless. Cover: Grey EPDM. Reinforcement: Multiple plies of polyester tire cord with helix wire.




Temperature: -40°F to 225°F
Sizes: 1" - 4"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Hose
1	200	NF-6403-100
1-1/2	200	NF-6403-150
2	200	NF-6403-200

Connoisseurs Suction & Discharge Hose

Construction: Tube: White Chlorobutyl. Cover: Grey EPDM abrasion resistant. Reinforcement: Multiple plies of polyester tire cord & dual monofilament helix.



Temperature: -40°F to 225°F
Sizes: 1" - 4"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Hose
1	250	NF-6506-100
1-1/2	250	NF-6506-150
2	\$ 250.00	NF-6506-200

Connoisseurs Suction & Discharge Hose

Construction: Tube: White Chlorobutyl. Cover: Grey EPDM corrugated. Reinforcement: Multiple plies of polyester tire cord with helix wire.



Temperature: -40°F to 240°F
Sizes: 3/4" - 4"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Hose
1	150	NF-6514-100
1-1/2	150	NF-6514-150
2	150	NF6514-200

Connoisseurs Suction & Discharge Hose

Construction: Tube: White Chlorobutyl. Cover: Grey EPDM corrugated. Reinforcement: Multiple plies of polyester tire cord with helix wire.



Temperature: -40°F to 240°F
Sizes: 3/4" - 4"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Hose
1	250	NF-6515-100
1-1/2	250	NF-6515-150
2	250	NF-6515-200

Fitting Options

Choose MxM, FxF, or MxF



Male Din Fitting	Female Din Fitting with nut	Crimped Tri-Clamps	Crimped Tri-Clamps with Bumper	Crimped Tri-Clamp One Piece
1	1	1	1	1
1-1/2	1-1/2	1-1/2	1-1/2	1-1/2
2	2	2	2	2

Nutriflo® Heavy-Duty PVC Hose

Construction: Clear Pliovic® PVC (FDA, 3-A, USDA compliant), NSF-61 tube. Clear Pliovic® cover. Clear high-density Pliovic® helix reinforcement.



Temperature: -15°F to 158°F

Sizes: 1 1/2" - 4"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Hose
1-1/2	89	NTF150
2	79	NTF200

PVC Clear Standard Suction Hose

Construction: Clear PVC with white helix. Smooth wall and interior.



Temperature: -10°F to 130°F

Sizes: 1" - 2"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Hose
1	90	SPT100
1-1/2	90	SPT150
2	90	SPT200

Velocity® Beverage Transfer Hose

Construction: Clear Pliovic® (FDA, 3-A, USDA compliant), NSF-61 tube. Clear Pliovic compound cover with polyester synthetic yarn reinforcement. White rigid PVC compound helix.



Temperature: -13°F to 140°F

Sizes: 1 1/2" - 3"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Hose
1-1/2	110	WSTF150
2	100	WSTF200

Fitting Options



Male Din Fitting	Female Din Fitting with nut	Crimped Tri-Clamps	Crimped Tri-Clamps with Bumper	Crimped Tri-Clamp One Piece
1	1	1	1	1
1-1/2	1-1/2	1-1/2	1-1/2	1-1/2
2	2	2	2	2

Gaskets

Size (in.)	Description	Part Number
1	1" White Silicone Gasket	TC-40MP-XW100
1-1/2	1-1/2" White Silicone Gasket	TC-40MP-XW150
2	2" White Silicone Gasket	TC-40MP-XW200



Clamps

Size (in.)	Description	Part Number
1-1/2	1" & 1-1/2" Single Pin Clamp	TC-13MHMM-150
2	2" Single Pin Clamp	TC-13MHMM-200
1-1/2	1" & 1-1/2" Spring Clamp	TC-13MHMM-Q150
2	2" Spring Clamp	TC-13MHMM-Q200



Barbed Sanitary Adapters

Size (in.)	Description	Rubber Hose	Brewery Hose
1	Stainless Steel Barbed Adapters	C414MPHR-1	C414MPHRL-1
1-1/2	Stainless Steel Barbed Adapters	C414MPHR-15	C414MPHRL-15
2	Stainless Steel Barbed Adapters	C414MPHR-2	C414MPHRL-2



Threaded Sanitary Adapters

Size (in.)	Description	Male NPT	Female NPT
1	Stainless Steel Threaded Adapters	C421MP-1	C422MP-1
1-1/2	Stainless Steel Threaded Adapters	C421MP-15	C422MP-15
2	Stainless Steel Threaded Adapters	C421MP-2	C422MP-2



Butterfly Valves

FEATURES:

- Material: 316L forged stainless steel body and disc
- Seat options: silicone, EPDM, FKM
- Low resistance to flow
- Bi-directional flow
- Polyacetal bushings for the valve disc for reduced friction and increased life cycle
- All wetted surfaces are sanitary finished to $\leq 32R_x$



REPAIR KITS AVAILABLE

Size	Butterfly Valve (Viton Seat)	Butterfly Valve (Buna Seat)	Butterfly Valve (Silicone Seat)	Butterfly Valve (Teflon Seat)
1	BFV100-VITON	BFV100-BUNA	BFV100-SIL	BFV100-PTFE
1.5	BFV150-VITON	BFV150-BUNA	BFV150-SIL	BFV150-PTFE
2	BFV200-VITON	BFV200-BUNA	BFV200-SIL	BFV200-PTFE
3	BFV300-VITON	BFV300-BUNA	BFV300-SIL	BFV300-PTFE
4	BFV400-VITON	BFV400-BUNA	BFV400-SIL	BFV400-PTFE

Sanitary Check Valves

FEATURES:

- Material: Forged 316L stainless steel
- Lower resistance to flow
- Suitable for low and medium viscosity fluids
- Full size flow plate
- Long stem bushing for better life cycle
- All wetted surfaces are sanitary finished to $\leq 32R_x$
- Operating temperature range: 15°F to 200°F
- Maximum operating pressure: 145 PSI



Size	Sanitary Spring Check Valve
1	SCV100
1.5	SCV150
2	SCV200
3	SCV300
4	POR

Rotating Sanitary Spray Balls

Application:

- ideal for cleaning all types of tanks and vessels

Features:

- stainless steel ball bearings eliminate rust
- cleaning solution lubricates unit
- mirror-like finish (OD)
- spray pattern: 360°
- available connections: clamp and NPT



Size	Spinning Spray Ball
.75 NPT	SRH360NPT-G075
1.5 CLAMP	SRH360CMP-G150
1.5 NPT	SRH360NPT-R150

Silicone

Construction: Raw materials meet FDA requirements per FDA 21 CFR 177.2600 for use with food contact surfaces.

Temperature: -100°F to 500°F (350°F max for NSF applications)

Sizes: 1/16" - 3/4"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Tubing
3/8	10	2802086
1/2	10	2802471
3/4	10	2803087




Clear PVC Tubing

Construction: Clear PVC tube

Temperature: - 10°F to 130°F

Sizes: 1/8" - 2"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Tubing
3/8	45	TPVC-0601
1/2	30	TPVC-0801
3/4	35	TPVC-1202
1	25	TPVC-1602



Reinforced PVC Tubing

Construction: Crystal clear PVC compound, formulated with ingredients in compliance with applicable FDA(03) requirements. Reinforced with spiraled polyester yarn and longitudinal orange tracer yarns for identification.

Temperature: 25°F to 150°F

Sizes: 1/4" - 2"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Tubing
1/2	200	TRPVC-08
3/4	150	TRPVC-12
1	125	TRPVC-16
1-1/4	100	TRPVC-24
1-1/2	75	TRPVC-32



Don't see what you need? Give us a call and we can get it for you!

For pricing and availability call us at 630-607-1900



Antimicrobial Beverage Tubing

Clearflo® Ag-47 Clear PVC Tubing

Construction: Clear PVC tube

Temperature: - 10°F to 130°F

Sizes: 1/8" - 2"

Hose Inside Dia. (in.)	Max. Pressure (psi)	Bulk Tubing
3/8	45	TPVCAG-0601
1/2	30	TPVCAG-0801
3/4	35	TPVCAG-1202
1	25	TPVCAG-1602

Don't see what you need? Give us a call and we can get it for you!

For pricing and availability call us at 630-607-1900

Washdown & Sanitizing Hose

Sani-Wash™ 300

Construction: EPDM synthetic rubber tube, White EPDM synthetic rubber cover with a textile reinforcement.



Temperature: -40°F to 200°F
Sizes: 1/2" - 1"

Hose Inside Dia. (in.)		Max. Pressure (psi)	Bulk Hose	Coupling Options Brass GHT, Stainless Steel/Brass GHT, Swivels, Nozzles
1/2		300	CR050	
3/4		300	CR075	
1		300	CR100	



Fortress Washdown

Construction: Black nitrile synthetic rubber tube. Cover is a Yellow Carbyn™ synthetic rubber, RMA Class A (High Oil Resistance) with Microban product protection. Reinforcement is spiral synthetic yarn.



Temperature: -20°F to 200°F
Sizes: 1/2" - 1"

Hose Inside Dia. (in.)		Max. Pressure (psi)	Bulk Hose	Coupling Options Brass GHT, Stainless Steel/Brass GHT, Swivels, Nozzles
1/2		300	FRT050	
3/4		300	FRT075	
1		300	FRT100	



Other Products Available Upon Request ** Stocked Locally **

Mixing Stations Stainless Steel Gauges Valves Pipe Fittings Dry Food Hoses



Sanitary Tubing Cam & Groove Fittings Plastic Tubing Custom Sanitary Gaskets Compression



Gauges

Size (in.)	Description	Part Number
1-1/2"	Sanitary Stainless Steel Pressure Gauge	ESP-301LFW
2"	Sanitary Stainless Steel Pressure Gauge	1032-200

Tri-Clamp size, pressures and dial sizes can be customized to your needs.
Please call with specifications.



Nozzles

Size (in.)	Description	Part Number
1/2"	Brass Nozzle White Cover with Swivel Adapter	SK-150B-W-A
1/2"	SS Nozzle White Cover with Swivel Adapter	SK-150S-W-A
1/2"	Brass Nozzle with White Cover	SK-150B-W
1/2"	Stainless Steel Nozzle with White Cover	SK-150S-W

Other cover colors available



Swivel Adapter

Size (in.)	Description	Part Number
1/2"	1/2" Barb X 1/2" MNPT SS Swivel	SK-8-1/2-S
1/2"	1/2" Barb X 1/2" MNPT SS Swivel Ball Type	SK-8-B1/2-S
3/4"	3/4" Barb X 1/2" MNPT SS Swivel	SK-8-3/4-S
3/4"	3/4" Barb X 1/2" MNPT SS Swivel Ball Type	SK-8-B3/4-S



Mixing Units

Mixer Body	Description	Type	Part Number
Brass	Mixing unit w/ globe valves	Hot & Cold	3600M-B
Stainless	Mixing unit w/ globe valves	Hot & Cold	3600M-S
Brass	Mixing unit w/ ball valves & temp gage	Hot & Cold	3600BM-B-T



Hose Reel

Size (in.)	Description	Part Number
3/8"	Spring retractable stainless steel hose reel w/o hose	LC607 OLS
1/2"	Spring retractable stainless steel hose reel w/o hose	LC800 OLS

*Hose can be added at additional cost. Contact us for details





Company Name	Telephone
Address	Fax
City, State, Zip Code	Email

When evaluating hose applications, we use the acronym "S.T.A.M.P.E.D." to be sure all the right questions are answered to you get the correct assembly for your application.

Size

Temperature

Application

Material(s) Being Conveyed

Pressure

Ends

Delivery

Additional Information